



Mirafi® MTK Paving Fabric

Self-Adhering Waterproofing Membrane

OUR COMPANY

TenCate™ develops and produces materials that function to increase performance, reduce costs and deliver measurable results by working with our customers to provide advanced solutions.

OUR PRODUCT

As pavement ages imperfections appear, joints become prominent and cracks occur. Mirafi® MTK paving fabric is engineered with an impervious membrane specifically designed to function as a moisture barrier on existing roadways, bridge decks, and airport runways and taxiways to prevent water permeation or penetration through pavement surfaces.

Mirafi® MTK paving fabric adds durability and extend the life cycle of a pavement system by reducing water percolation and moisture penetration throughout the pavement system into the sub-base. They also provide excellent stress-relief (reflective crack reduction) for moderate to severe pavement cracks and joints.

The Difference Mirafi® MTK Paving Fabric Makes:

- Prevents surface moisture intrusion.
- Easy and inexpensive to install.
- Reduces structural decay of pavement.
- Reduces traffic disruption.
- Sticks readily to concrete, asphalt or wood decks.
- Can be installed in a wide range of temperatures.
- Minimizes reflective cracking by bridging transverse and longitudinal cracks.
- Minimizes reflective cracking between dissimilar surfaces.
- Stretches to span cracks without breaking.

Mirafi® MTK paving fabric is a unique, cost-effective waterproofing membrane comprised of a self-adhering, rubberized, asphalt mastic and a geotextile fabric. A convenient peel-n-stick release paper covers the self-adhesive mastic, and is removed prior to installation on both products. Mirafi® MTK paving fabric is made with a non-woven polypropylene geotextile fabric and is appropriate for use over moderate cracks.



Mirafi® MTK Paving Fabric

OUR APPLICATIONS

Mirafi® MTK paving fabric provides long term reinforcement that extends the life of pavement in the following applications:

- Highway and street surfaces
- Transverse and longitudinal highway joints & cracks
- Lane-widening joints
- Taxiways and runways
- Bridge deck restoration



Mirafi® MTK Paving Fabric


Self-Adhering Waterproofing Membrane

Mirafi® MTK Technical Data (All values are typical values)

Property	Test Method	Units	Typical Values
Grab tensile strength	ASTM D4632	lbs (N)	200 (890)
Grab tensile elongation	ASTM D4632	%	80
Puncture strength	ASTM E154	lbs (N)	200 (890)
Permeance	ASTM E96 method B	perms	0.10 max
Strip tensile	ASTM D882, modified	lbs/in (kN/m)	50 (8.8)
Pliability	1/4" mandrel 180° @ -25°F (31.7°C)	-	No cracks in fabric or rubberized asphalt
Thickness	ASTM D5199	mils (mm)	79 (2.0)

Mirafi® MTK Packaging

Roll Dimensions	Packaging	Weight/Box
12 in x 50 ft (.30 m x 15.2 m)	2 rolls/box	27 lbs (12 kg)
18 in x 50 ft (.46 m x 15.2 m)	1 roll/box	22 lbs (10 kg)
24 in x 50 ft (.60 m x 15.2 m)	1 roll/box	30 lbs (14 kg)
36 in x 50 ft (.91 m x 15.2 m)	1 roll/box	40 lbs (18 kg)

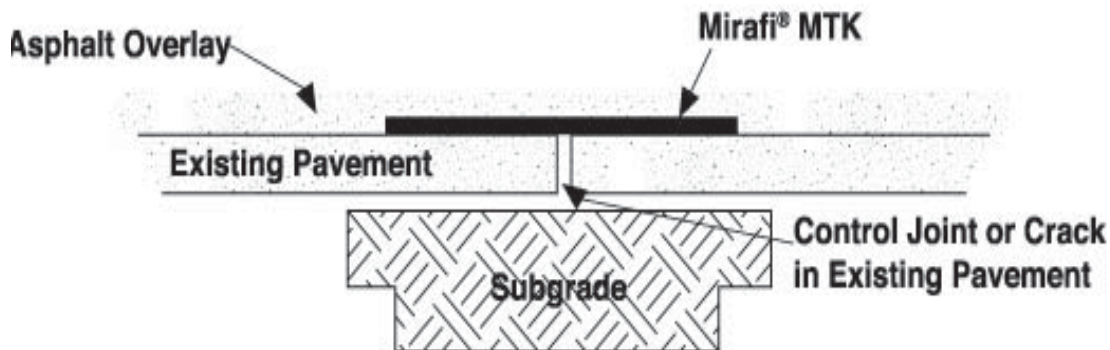

TenCate™ Geosynthetics North America does not assume liability for the accuracy or completeness of this information or for the ultimate use by the purchaser. TenCate™ Geosynthetics North America disclaims any and all express, implied, statutory standards, warranties, guarantees, including without limitation any implied warranty as to merchantability or fitness for a particular purpose or arising from a course of dealing or usage of trade as to any equipment, materials, or information furnished herewith. This document should not be construed as engineering advice.

Mirafi® is a registered trademark of Nicolon Corporation.

© 2011 TenCate Geosynthetics North America

PDS.MTK1211

365 South Holland Drive Tel 800 685 9990 Fax 706 693 4400
 Pendergrass, GA 30567 Tel 706 693 2226 www.mirafi.com




 materials that make a difference